

Level 3 Cambridge Technical in Engineering

05822/05823/05824/05825/05873

Formula Booklet



Unit 1 Mathematics for engineering
Unit 2 Science for engineering
Unit 3 Principles of mechanical engineering
Unit 4 Principles of electrical and electronic engineering
Unit 23 Applied mathematics for engineering

This booklet contains formulae which learners studying the above units and taking associated examination papers may need to access.

Other relevant formulae may be provided in some questions within examination papers. However, in most cases suitable formulae will need to be selected and applied by the learner. Clean copies of this booklet will be supplied alongside examination papers to be used for reference during examinations.

Formulae have been organised by topic rather than by unit as some may be suitable for use in more than one unit or context.

Note for teachers

This booklet does not replace the taught content in the unit specifications or contain an exhaustive list of required formulae. You should ensure all unit content is taught before learners take associated examinations.

© OCR 2021 [L/506/7266, R/506/7267, Y/506/7268, D/506/7269, R/506/7270]

1. Trigonometry and Geometry

1.1 Geometry of 2D and 3D shapes

1.1.1.Circles and arcs

Circle: radius r


Area of a circle = πr^2

Circumference of a circle = $2\pi r$

Co-ordinate equation of a circle: radius *r*, centre (*a*, *b*)

$$(x-a)^2 + (y-b)^2 = r^2$$

Arc and sector: radius r, angle θ




Arc length = θr , for θ expressed in radians Area of sector = $\frac{1}{2}r^2\theta$, for θ expressed in radians

Arc length $=\frac{\theta}{180}\pi r$, for θ expressed in degrees Area of sector $=\frac{\theta}{360}\pi r^2$, for θ expressed in degrees

Converting between radians and degrees


x radians =
$$\frac{180x}{\pi}$$
 degrees
x degrees = $\frac{\pi x}{180}$ radians

1.1.2 Triangles

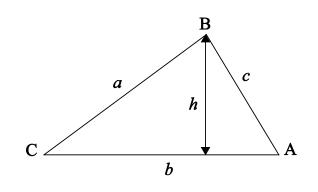

Area $=\frac{1}{2}bh$ or $\frac{1}{2}bc\sin A$


1.2 Volume and Surface area of 3D shapes



Surface area = 2lw + 2wh + 2hl= 2(lw + wh + hl)


Volume = lwh

Sphere




Surface area = $4\pi r^2$ Volume = $\frac{4}{3}\pi r^3$

Cone




Surface area = $\pi r^2 + \pi r l$ Volume = $\frac{1}{3}\pi r^2 h$ Cylinder




Surface area = $2\pi r^2 + 2\pi rh$ Volume = $\pi r^2 h$

Rectangular Pyramid

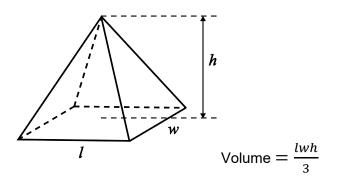

Prism

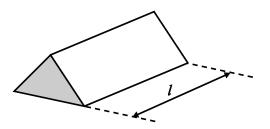


Volume = area of shaded cross-section $\times l$


Density

Density = $\frac{\text{mass}}{\text{volume}}$


1.3 Centroids of planar shapes

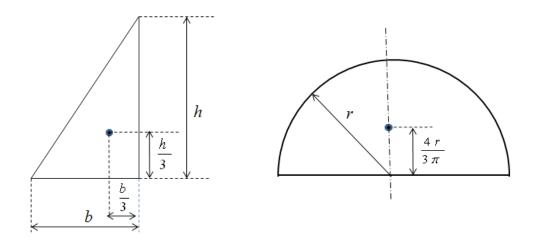

1.4 Trigonometry

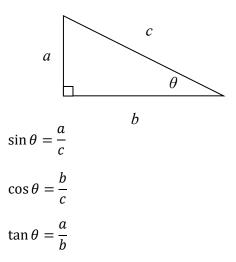

Pythagoras' rule: $c^2 = a^2 + b^2$



Sine rule: $\frac{a}{\sin A} = \frac{b}{\sin B} = \frac{c}{\sin C}$ Cosine rule: $a^2 = b^2 + c^2 - 2bc \cos A$

1.4.1 Trigonometric identities

Basic trigonometric values

$$\sin 60^\circ = \frac{\sqrt{3}}{2}$$
$$\cos 60^\circ = \frac{1}{2}$$
$$\tan 60^\circ = \sqrt{3}$$
$$\sin 45^\circ = \cos 45^\circ = \frac{1}{\sqrt{2}}$$
$$\tan 45^\circ = 1$$
$$\sin 30^\circ = \frac{1}{2}$$
$$\cos 30^\circ = \frac{\sqrt{3}}{2}$$
$$\tan 30^\circ = \frac{1}{\sqrt{3}}$$

Trigonometric identities

$$\sin A = \cos(90^\circ - A) \text{ for angle } A \text{ in degrees}$$

$$\cos A = \sin(90^\circ - A) \text{ for angle } A \text{ in degrees}$$

$$\sin A = \cos\left(A - \frac{\pi}{2}\right)$$

$$\cos A = -\sin\left(A - \frac{\pi}{2}\right)$$

$$\tan A = \frac{\sin A}{\cos A}$$

$$\sin^2 A + \cos^2 A = 1$$

$$\sin(-A) = -\sin A$$

$$\cos(-A) = \cos A$$

$$\sin(A \pm B) = \sin A \cos B \pm \cos A \sin B$$

$$\cos(A \pm B) = \cos A \cos B \mp \sin A \sin B$$

$$\sin 2A = 2 \sin A \cos A$$

$$\cos 2A = \cos^2 A - \sin^2 A$$

2. Calculus

2.1 Differentiation

f(x)	$\frac{\mathrm{df}(x)}{\mathrm{d}x}$
С	0
x^n	nx^{n-1}
$\sin(ax)$	$a\cos(ax)$
$\cos(ax)$	$-a\sin(ax)$
$\tan(ax)$	$a \sec^2(ax)$
e ^{ax}	ae^{ax}
$\ln(ax)$	$\frac{1}{x}$
a^{x}	$a^{x} \ln a$
$\log_a x$	$\frac{1}{x \ln a}$

2.1.1 Differentiation of the product of two functions

If
$$y = u \times v$$
 $\frac{dy}{dx} = u \frac{dv}{dx} + v \frac{du}{dx}$

2.1.2 Differentiation of the quotient of two functions

If
$$y = \frac{u}{v}$$
 $\frac{dy}{dx} = \frac{v\frac{du}{dx} - u\frac{dv}{dx}}{v^2}$

2.1.3 Differentiation of a function of a function

 $\frac{\mathrm{d}y}{\mathrm{d}x} = \frac{\mathrm{d}u}{\mathrm{d}v} \frac{\mathrm{d}v}{\mathrm{d}x}$ If y = u(v)

_

2.2 Integration

2.2.1 Indefinite integrals

f(x)	$\int f(x)\mathrm{d}x(+c)$
а	ax
x^n for $n \neq -1$	$\frac{x^{n+1}}{n+1}$
$\frac{1}{x}$	$\ln x $
e ^{ax}	$\frac{e^{ax}}{a}$
a ^x	$\frac{a^x}{\ln a}$
sin(ax)	$\frac{-\cos(ax)}{a}$
cos(ax)	$\frac{\sin(ax)}{a}$

2.2.2 Definite integral

$$\int_{a}^{b} f(x) dx = [F(x)]_{a}^{b} = F(b) - F(a)$$

2.2.3 Integration by parts

$$\int u \frac{\mathrm{d}v}{\mathrm{d}x} \mathrm{d}x = uv - \int v \frac{\mathrm{d}u}{\mathrm{d}x} \mathrm{d}x$$

3. Algebraic formulae

3.1 Solution of quadratic equation

$$ax^{2} + bx + c = 0, \quad a \neq 0$$
$$\Rightarrow \quad x = \frac{-b \pm \sqrt{b^{2} - 4ac}}{2a}$$

3.2 Exponentials/Logarithms

 $y = e^{ax} \Rightarrow \ln y = ax$

4. Measurement

Absolute error = indicated value – true value

Relative error = <u>absolute error</u> true value

Absolute correction = true value – indicated value

Relative correction = <u>absolute correction</u> true value

5. Statistics

For a sample, size N, x_1 , x_2 , x_3 , ..., x_N ,

sample mean
$$\bar{x} = \frac{x_1 + x_2 + x_3 + \dots + x_N}{N}$$

standard deviation

$$S = \sqrt{\frac{1}{N} \sum_{i=1}^{N} (x_i - \bar{x})^2} = \sqrt{\frac{1}{N} \sum_{i=1}^{N} x_i^2 - (\bar{x})^2}$$

5.1 Probability

For events A and B, with probabilities of occurrence P(A) and P(B),

$$P(A \text{ or } B) = P(A) + P(B) - P(A \text{ and } B)$$

If A and B are mutually exclusive events,

P(A and B) = 0P(A or B) = P(A) + P(B)

If A and B are independent events,

$$P(A \text{ and } B) = P(A) \times P(B)$$

6. Mechanical equations

6.1 Stress and strain equations

axial stress (σ) =axial force
cross sectional areaaxial strain (ζ) =change in length
original lengthshear stress (τ) =shear force<br/shear area</th>Young's modulus (E) =stress
strainWorking or allowable stress =ultimate stress

Factor of Safety (FOS)


6.2 Mechanisms

Mechanical advantage (MA) = $\frac{\text{output force (or torque)}}{\text{input force (or torque)}}$


Velocity ratio (VR) = $\frac{\text{velocity of output from a mechanism}}{\text{velocity of input to a mechanism}}$

6.2.1 Levers


Class one lever

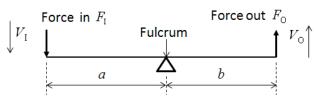

Class two lever



Class three lever

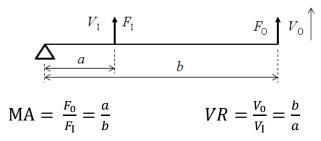

6.2.2 Gear systems

- **MA** = <u>Number of teeth on output gear</u> Number of teeth on input gear
- VR = <u>Number of teeth on input gear</u> Number of teeth on output gear

6.2.3 Belt and pulley systems

- **MA** = <u>Diameter of output pulley</u> Diameter of input pulley
- VR = <u>Diameter of input pulley</u> Diameter of output pulley

6.3 Dynamics

Newton's equation force = mass x acceleration (F = ma)

Gravitational potential energy (W_p) = mass x gravitational acceleration x height (mgh)

Kinetic energy (W_k) = $\frac{1}{2}$ mass x velocity² ($\frac{1}{2}mv^2$)

Work done = force x distance (*Fs*)

Instantaneous power = force x velocity (*Fv*)

Average power = work done / time $\left(\frac{W}{t}\right)$

Friction Force \leq coefficient of friction x normal contact force ($F \leq \mu N$)

Momentum of a body = mass x velocity (*mv*)

Pressure = force / area $\left(\frac{F}{A}\right)$

6.4 Kinematics

Constant acceleration formulae

a – acceleration

<i>s</i> – distance	$v^2 = u^2 + 2as$
<i>t</i> – time	$s = ut + \frac{1}{2}at^2$
<i>u</i> – initial velocity	2
v – final velocity	v = u + at
,	$s = \frac{1}{2}(u+v)t$
	$s = vt - \frac{1}{2}at^2$

6.5 Fluid mechanics

Pressure due to a column of liquid

= height of column × gravitational acceleration × density of liquid $(hg\rho)$

Up-thrust force on a submerged body

= volume of submerged body × gravitational acceleration × density of liquid ($Vg\rho$)

6.5.1 Energy equations

Non-flow energy equation

$$U_1 + Q = U_2 + W$$
 so $Q = (U_2 - U_1) + W$

where Q = energy entering the system W = energy leaving the system U_1 = initial energy in the system U_2 = final energy in the system.

Steady flow energy equation

$$Q = (W_2 - W_1) + W$$

where Q = heat energy supplied to the system W_1 = energy entering the system W_2 = energy leaving the system W = work done by the system.

7. Thermal Physics

<i>p</i> –	pressure

- V volume
- C-constant
- T- absolute temperature
- n number of moles of a gas
- R the gas constant

Boyle's law	pV = C	$p_1V_1 = p_2V_2$
Charles' law	$\frac{V}{T} = C$	$\frac{V_1}{T_1} = \frac{V_2}{T_2}$
Pressure law	$\frac{p}{T} = C$	$\frac{p_1}{T_1} = \frac{p_2}{T_2}$
Combined gas law	$\frac{p_1 V_1}{T_1} = \frac{p_2 V_2}{T_2}$	
Ideal gas law	pV = nRT	
Characteristic gas law	pV = mRT where m = mass of specific gas and R = specific gas constant	
Efficiency	$\eta = rac{ ext{work output}}{ ext{work input}}$	

7.1 Heat formulae

Latent heat formula

Heat absorbed or emitted during a change of state, Q = mL

where Q = Energy, L = latent heat of transformation, m = mass

Sensible heat formula

Heat energy, $Q = mc\Delta T$

where Q = Energy, m = mass, c = specific heat capacity of substance, ΔT is change in temperature

8. Electrical equations

Q = charge	<i>N</i> = number of turns
V = voltage	θ = angle (in radians)
<i>I</i> = current	f = Frequency (in cycles per second)
R = resistance	$\omega = 2\pi f$
ρ = resistivity	X_L , X_C = inductive reactance, capacitive reactance
P = power	Z = impedance
E = electric field strength	\emptyset = phase angle
(capacitors)	E = emf (motors)
C = capacitance	I_a = armature current
L = inductance	I_f = field current
t = time	I_l = load current
l = length	R_a = armature resistance
τ = time constant	R_f = field resistance
W = energy	n = speed (motors)
A = cross sectional area	T = torque
Φ = magnetic flux	η = efficiency

Charge and potential energy	Q = It
	V = W/Q
	W = Pt
Drift velocity (current)	I = nAve
Power	P = VI
	$P = I^2 R$
	$P = V^2/R$
Resistance and Ohms law	Series resistance: $R = R_1 + R_2 + R_3 + \dots$
	Parallel resistance: $\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$
	Ohms law: $R = V/I$ $V = IR$ $I = V/R$
Resistivity	$\rho = RA/l$
Electric field and capacitance	E = V/d
	C = Q/V
	$W = \frac{1}{2}QV$
Inductance and self-inductance	$L = \Phi N I$
	$W_L = \frac{1}{2}LI^2$
RC circuits	$\tau = RC$
	$v = v_0 e^{-t/RC}$
AC waveforms	$v = V \sin \Theta$
	$i = I \sin \Theta$
	$v = V \sin \omega t$
	$i = I \sin \omega t$
AC circuits – resistance and reactance	R = V/I
	$X_L = V/I$ and $X_L = 2\pi f L$
	$X_C = V/I$ and $X_C = \frac{1}{2\pi fC}$
Series RL and RC circuits	$Z = \sqrt{(R^2 + X_L^2)}$ and $\cos \phi = R/Z$
-	$Z = \sqrt{(R^2 + X_c^2)}$ and $\cos \phi = R/Z$
L	

Series RLC circuits	When $X_L > X_C$
	$Z = \sqrt{[R^2 + (X_L - X_C)^2]} \text{ and } \cos \theta = R/Z$
	When $X_C > X_L$
	$Z = \sqrt{[R^2 + (X_C - X_L)^2]} \text{ and } \cos \theta = R/Z$
	When $X_L = X_C$
	Z = R
DC motor	$V = E + I_a R_a$
DC generator	$V = E - I_a R_a$
DC Series wound self-excited generator	$V = E - I_a R_t$
	Where $R_t = R_a + R_f$
DC Shunt wound self-excited generator	$V = E - I_a R_a$
	Where $I_a = I_f + I_l$
	$I_f = V/R_f$
	$I_l = P/V$
DC Series wound motor	$V = E + I_a R_t$
	Where $R_t = R_a + R_f$
	$E \propto \Phi n$
DC Shunt wound motor - No-load	$V = E_1 + I_a R_a$
conditions:	Where $I_a = I_l - I_f$
	$I_f = V/R_f$
DC Shunt wound motor - Full load	$V = E_2 + I_a R_a$
conditions:	Where $I_a = I_l - I_f$
	$E_1/E_2 = n_1/n_2$
	$T_1/T_2 = (\Phi_1 I_{a1})/(\Phi_2 I_{a2})$
Speed control of DC motors - Shunt motor	$V = E + I_a R_a$
	$n = (V - I_a R_a) / (k\Phi)$
DC Machine efficiency	$\eta = $ output/input
	$\eta = 1 - (losses/input)$
	с , Г/



Copyright Information: OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website (www.ocr.org.uk) after the live examination series. If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact the Copyright Team, OCR (Oxford, Cambridge and RSA Examinations), The Triangle Building, Shaftesbury Road, Cambridge, CB2 8EA OCR is part of the Cambridge Assessment Group. Cambridge Assessment is the brand name of University of Cambridge Local Examinations Syndicate (UCLES), which is itself a department of the University of Cambridge.