

Friday 18 January 2013 – Morning

AS GCE PHYSICS B (ADVANCING PHYSICS)

G492/01 Understanding Processes /
Experimentation and Data Handling

ADVANCE NOTICE

Duration: 2 hours



INSTRUCTIONS TO CANDIDATES

- Take the article away and read through it carefully. Spend some time looking up any technical terms or phrases you do not understand. You are **not** required to research further the particular topic described in part 3, although you might find it helpful to try out the measurement ideas described in part 1.
- For the examination on Friday 18 January 2013 you will be given a fresh copy of this article, together with a question paper. You will not be able to take your original copy into the examination with you.
- The values of standard physical constants will be given in the Advancing Physics Data, Formulae and Relationships booklet. Any additional data required are given in the appropriate question.

INFORMATION FOR CANDIDATES

- Questions in Section C of paper G492/01 (Understanding Processes, Experimentation and Data Handling) will refer to this Advance Notice material and may give additional data related to it.
- Section C will be worth about 40 marks.
- Sections A and B of paper G492/01 will be worth about 60 marks, and will examine the *Understanding Processes* section of the specification.
- There will be 2 marks for quality of written communication (QWC) assessed in Section B.
- This document consists of **8** pages. Any blank pages are indicated.

1 Simple measurements of stress and strain

You may wish to try this experiment at school. Remember to apply the appropriate safety procedures.

Using simple equipment, the stress and strain of common metal wires like copper can easily be measured and the Young modulus of the material obtained. Fig. 1.1 shows a basic arrangement of the apparatus.

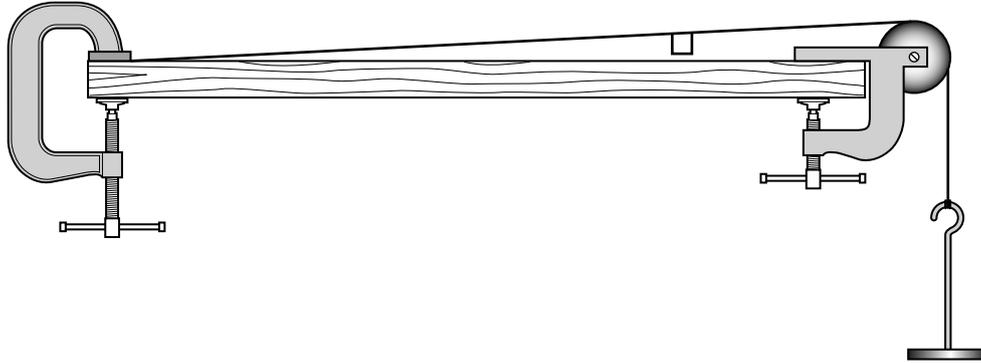


Fig. 1.1

A micrometer should be used to make measurements of the wire's diameter. It is important to note the limitations of the measuring equipment, particularly the resolution, as well as the need to repeat measurements. Another priority is to identify which measurement produces the most significant uncertainty, as uncertainties in the measurements will produce uncertainties in the calculated values of the stress and strain. Design of the experiment must take into account the fact that the strain must be kept low (below 1%) for any extension to be elastic.

BLANK PAGE

2 The performance of wind turbines

Wind turbines are increasingly being used as viable alternatives to the burning of fossil fuels for generating electricity. It is therefore important that the performance of different commercially-produced wind turbines can be measured and compared.

Results from a comparison of the power outputs of three small turbines **A**, **B** and **C** for a range of wind speeds are shown in Table 2.1. The three turbines were all designed to work at this range of wind speeds in similar conditions.

Wind speed/ m s^{-1}	Power output/kW		
	Turbine A	Turbine B	Turbine C
0	0.00	0.00	0.00
1	0.00	0.00	0.00
2	0.00	0.00	0.00
3	0.00	0.11	0.08
4	0.08	0.33	0.30
5	0.50	0.66	0.69
6	0.97	1.14	1.17
7	1.48	1.76	1.73
8	2.20	2.51	2.37
9	3.06	3.39	3.34
10	4.22	4.16	4.13

Table 2.1

Different conditions require different designs of turbines. The size of the blades and their angle of tilt to the oncoming wind will affect the amount of air 'trapped'. Also, wind speeds vary greatly with height and with geographical location.

However, one important variable to consider for any turbine is the area swept out by the rotor blades, as shown in Fig. 2.2. The electrical output of a wind turbine is directly related to this area, so the larger the area swept out by the rotor blades, the higher the output.

A modest increase in the rotor diameter will lead to significant increases in both the area swept out by the rotor blades and the amount of electricity that the turbine can generate.

Table 2.3 shows the dependence of the maximum theoretical power output for different rotor diameters in a constant wind speed of 10ms^{-1} .

Rotor diameter / m	Theoretical power output / kW
1	0.4
2	1.6
4	6.3
6	14.1
8	25.1
9	31.8

Table 2.3

The actual power production from a wind turbine will be influenced by many other factors, such as the efficiency, the height at which the turbine is located, and internal friction. For a particular wind speed, it is expected that the power output P will be directly proportional to the area A swept out by the rotor blades:

$$P = kA$$

where k is a constant.

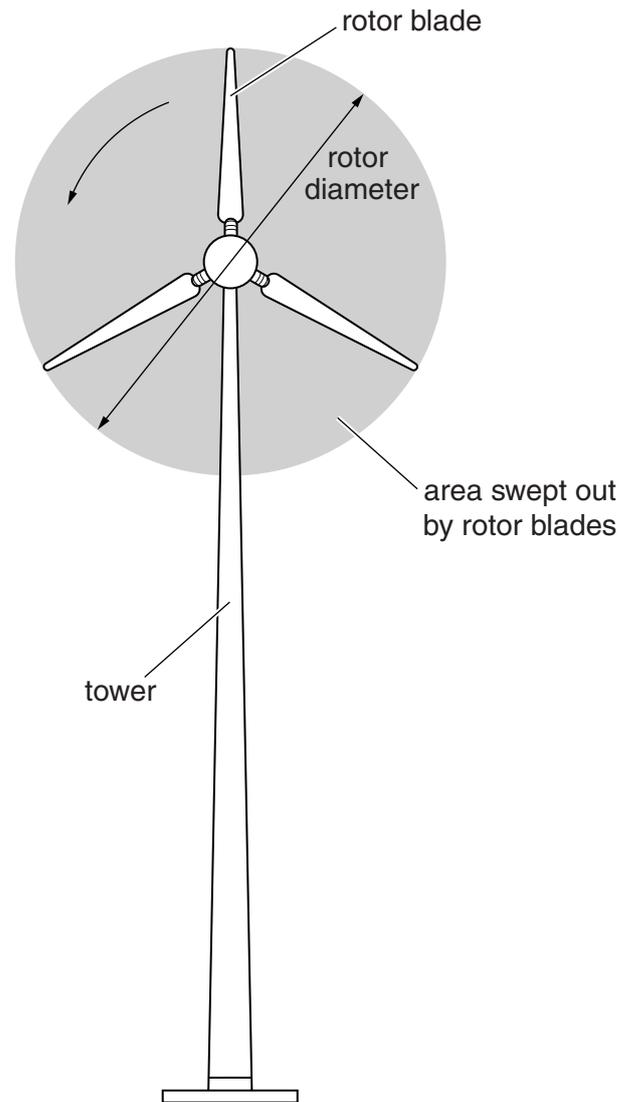


Fig. 2.2

3 Calculating longitude

The most common way to locate places on the surface of the Earth is by using co-ordinates called **latitude** and **longitude**, as shown in Fig. 3.1. These co-ordinates are measured in degrees, and represent specific places on the Earth. Calculating latitude is straightforward and latitudes have been known accurately for well over 2000 years.

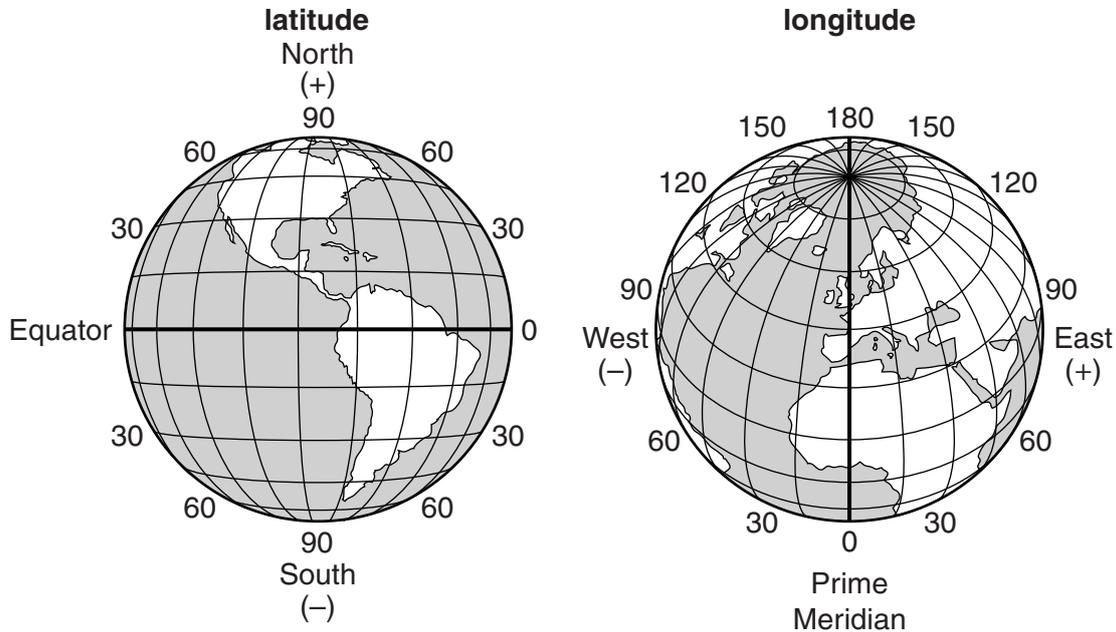


Fig. 3.1

Lines of longitude, called meridians, run perpendicular to lines of latitude, and pass through both Poles. By international agreement, the meridian line through Greenwich, in London, is given the value of zero degrees of longitude. This is known as the Prime Meridian.

Longitude is the angle between the Prime Meridian and any point east or west of it on the surface of the Earth. It takes 24 hours for a complete rotation of the Earth (relative to the Sun) and the circumference of the Earth can be divided into 360° of longitude.

If the difference between local time and Greenwich Mean Time (GMT) is known, then the longitude can be calculated. If your local time is ahead of GMT, you are to the east of Greenwich; if your local time is later, you are to the west. In each case, there are 15° of longitude for each hour of difference between local time and GMT.

Precise calculations of longitude require accurate and reliable time measurements. This was a problem that vexed civilisation for a long time. Near the Equator, one degree of longitude corresponds to approximately 100 km, so measurements need to be made to within a fraction of a degree, corresponding to a time of less than a minute. Very accurate pendulum clocks have been made since the beginning of the 18th century. Making an accurate clock which would stay in time for many months when carried around the world on a ship, so that you could always know the correct Greenwich time, presented a number of difficulties for navigators. It was not until the end of the 18th century that a suitable mechanical clock was made by John Harrison. This clock did not use a pendulum.

END OF ARTICLE

BLANK PAGE

**Copyright Information**

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website (www.ocr.org.uk) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact the Copyright Team, First Floor, 9 Hills Road, Cambridge CB2 1GE.

OCR is part of the Cambridge Assessment Group; Cambridge Assessment is the brand name of University of Cambridge Local Examinations Syndicate (UCLES), which is itself a department of the University of Cambridge.