

Modified Enlarged 24pt
OXFORD CAMBRIDGE AND RSA EXAMINATIONS

Tuesday 20 May 2025 – Afternoon

GCSE (9–1) Computer Science

**J277/02 Computational thinking,
algorithms and programming**

**Time allowed: 1 hour 30 minutes
plus your additional time allowance**

DO NOT USE:
a calculator

Please write clearly in black ink.

Centre number

--	--	--	--	--

Candidate number

--	--	--	--

First name(s) _____

Last name _____

READ INSTRUCTIONS OVERLEAF



INSTRUCTIONS

Use black ink.

Write your answer to each question in the space provided. If you need extra space use the lined pages at the end of this booklet. The question numbers must be clearly shown.

Answer ALL the questions.

INFORMATION

The total mark for this paper is 80.

The marks for each question are shown in brackets [].

ADVICE

Read each question carefully before you start your answer.

We advise you to spend approximately 50 minutes on Section A and approximately 40 minutes on Section B.

BLANK PAGE

SECTION A

We advise you to spend approximately 50 minutes plus your additional time allowance on Section A.

1 A program asks a user to enter a number. Only integer values between 1 and 100 (inclusive) are accepted. The program is tested.

(a) Tick (✓) ONE OR MORE boxes in each row to identify the type or types of test for each example of test data. [4]

Example test data	Normal test data	Boundary test data	Invalid / erroneous test data
27			
"Hello"			
105			
100			

(b) An algorithm is written for the program.

(i) Complete the algorithm for the program.

```
num = input("Enter a number between 1 and 100")
```

```
if num ..... AND ..... then
```

```
    print("accepted")
```

```
.....
```

5

```
    print("not accepted")
```

```
endif [3]
```

(ii) Give the identifier of ONE variable used in the algorithm in part (b)(i).


_____ **[1]**

(iii) Give ONE Boolean operator used in the algorithm in part (b)(i).

_____ **[1]**

BLANK PAGE

2 This flowchart uses iteration.

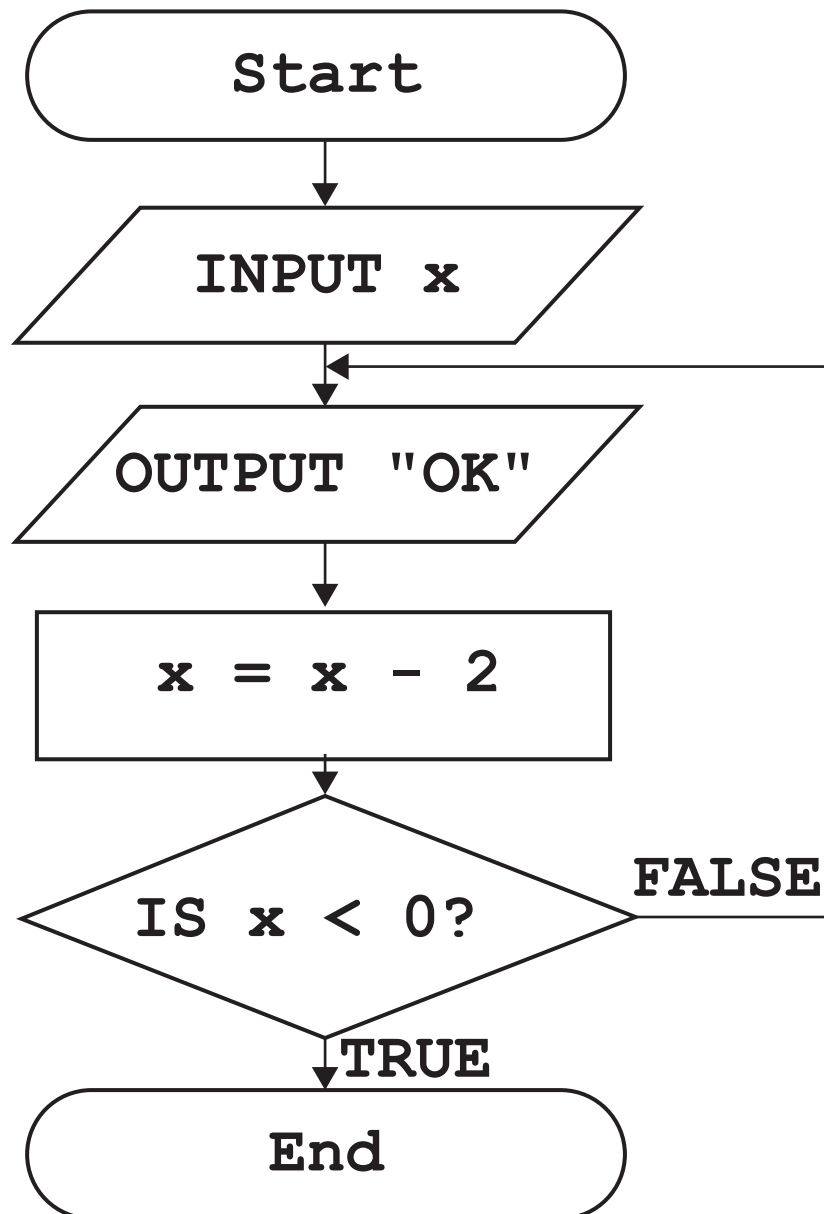

- (a) Complete the table by identifying how many times "OK" will be output for when each value is input. [2]

Input value	Number of times "OK" is output
3	
10	

- (b) Iteration is a programming construct.

- (i) Identify AND describe TWO different examples of iteration that can be used in a high-level language.

1 _____

2 _____

[4]

(ii) Give the names of TWO other programming constructs that are used in a high-level language.

1 _____

2 _____

[2]

- (c) A programmer implements the flowchart as a program in a high-level language using an Integrated Development Environment (IDE).

Identify and describe TWO tools that the programmer could use in the IDE to create a program from the flowchart.

Tool 1 _____

Description _____

Tool 2 _____

Description _____

[4]

3

- (a) Show the steps that a merge sort would take to put the data set into ascending numerical order. [4]**

2, 7, 3, 1, 9, 6, 5, 4

(b) Tick (✓) ONE box in each table to complete the descriptions. [3]

An insertion sort...

	Tick (✓) ONE box
uses an array of numbers with a sorted part and unsorted part	
picks out the middle value to begin with	
merges arrays of numbers together	

A bubble sort compares pairs of values and then:

	Tick (✓) ONE box
always swaps them	
swaps them if they are in the correct order	
swaps them if they are in the incorrect order	

A sorting algorithm can sort data in an array. An array:

	Tick (✓) ONE box
is declared with a fixed length	
stores multiple values that cannot be changed while the program is running	
can only be declared with a maximum of one-dimension (1D)	

- (c) An algorithm can be used to search for a value in an array. The algorithm follows these steps:**

**compares the first value in the array to the value being searched for
stops if the comparison is `true`
moves to the next value in the array if the comparison is `false`.**

- (i) Give the name of the searching algorithm described.**

_____ **[1]**

- (ii) Identify ONE OTHER condition that will cause the algorithm to stop.**

_____ **[1]**

BLANK PAGE

4 An algorithm is written to read numbers from the external text file `data.txt`

Each number is checked when it is read from the external text file. The number is output to the user if it is not 0.

(a) Complete the algorithm opposite using the OCR Exam Reference Language statements in the box. [5]

(b) Identify how casting is used in this algorithm.

[1]

Not all statements are used.

data	for	if
myFile.close()	myFile.readLine()	input()
myFile.writeLine()	open	print
temp	txt	x

```
myFile = ..... ("data.txt")
16 while NOT myFile.endOfFile()
    temp = .....
    if int (.....) != 0
        .....(temp)
    endif
endwhile
.....
```


- 5 A security system protects online credit card payments. The system has three inputs:**

Input	Description
A	True when the user enters their correct password
B	True when the user enters their correct PIN
C	True when the card is blocked

The output (P) is True if both of the following conditions are True:

the user has entered either their correct password or has entered their correct PIN
the card is NOT blocked.

(a) Draw the logic circuit for the security system [3]

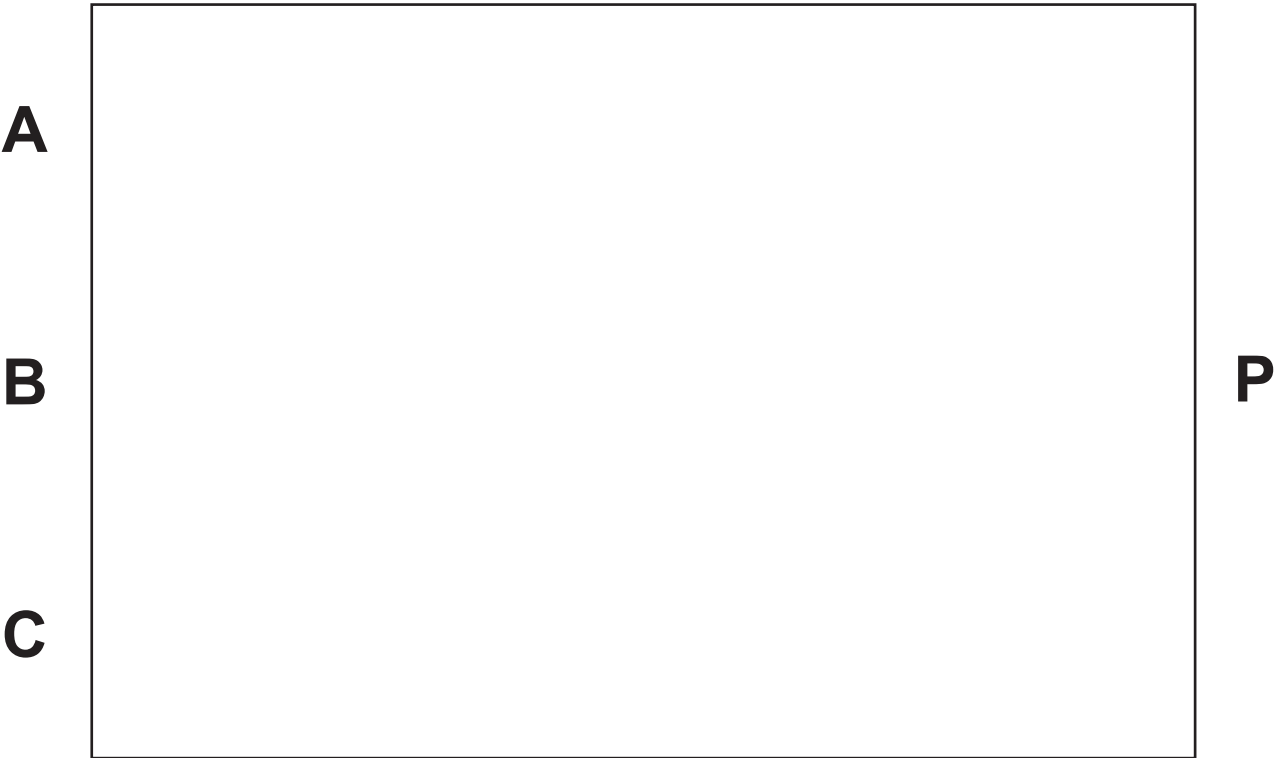

(b) Complete the truth table for $P = A \text{ AND } B$ [2]

A	B	P

(c) Computational thinking techniques were used to design the security system.

Draw ONE line to match each computational thinking technique to its correct example. [3]

**Computational
thinking
technique**

Example

Abstraction

The system is broken down into modules for security and payments.

Decomposition

There is an increase in the amount of RAM in the computer running the system

Algorithmic thinking

The user's identity, PIN and password are required. All other data is ignored.

The step-by-step process for users to securely pay online is designed.

(d) As part of the security system, the user is asked to choose a 4-digit value for their PIN. This PIN cannot be 1234 or 4321

Create an algorithm that:

**takes the PIN as input as a string
checks that the PIN is 4 characters in length**

**checks that the PIN is NOT either
"1234" or "4321"**

**outputs "VALID PIN" if the PIN meets
all of the criteria**

**outputs "INVALID PIN" if the PIN does
not meet all of the criteria.**

**You do NOT need to check that the
digits entered are numeric. [6]**

[illegible]

BLANK PAGE

SECTION B

We advise you to spend approximately 40 minutes plus your additional time allowance on Section B.

Some questions require you to respond using either the OCR Exam Reference Language or a high-level programming language you have studied. These are clearly shown.

6 OCR Rockfest is a yearly music festival. Visitors buy tickets to attend and watch the music acts.

A computer system is created to sell tickets and store information about visitors and the music acts.

(a) Visitors are asked to choose a password. The password is entered twice and stored in the variables `passA` and `passB`

- (i) Tick (✓) ONE box to identify the correct OCR Exam Reference Language statements for the design of this task. [1]

OCR Exam Reference Language to enter two passwords	Tick (✓) ONE box
<code>passA and passB = input("enter password twice")</code>	
<code>input("enter your password") = passA input("enter your password again") = passB</code>	
<code>passA = input("enter your password") passB = input("enter your password again")</code>	
<code>"passA" = input("enter your password") "passB" = input("enter your password again")</code>	

(ii) Design an algorithm that:

**checks if the passwords stored in
passA and passB are the same
outputs "passwords match" if they
are the same
outputs "passwords do not match"
if they are NOT the same.**

[3]

BLANK PAGE

- (b) The database table `TblMusic` stores data about the music acts.

Some of the data in `TblMusic` is shown:

ActID	Stage	Day	SetLength
1	Platinum	Saturday	0.5
2	Hills	Saturday	1.5
3	Triangle	Sunday	1.0
4	Platinum	Sunday	0.5

An SQL statement has been written to show `ActID` and `Stage` for all acts playing on Saturday. The SQL statement is incorrect.

```
SELECT ActID AND Stage
FROM TblActs
IF Day = Saturday
```

- (i) Refine the SQL statement to correct the errors.

[4]

(ii) Identify ONE example of a record from TblMusic

[1]

(iii) Give the most appropriate data type for each field shown. [2]

Field name	Data stored	Data type
Stage	The name of the stage	
SetLength	The length of each set in hours	

(c) Tickets to the festival are £60 each. Visitors can buy multiple tickets. For example, a visitor buying 4 tickets would pay £240.

(i) Write a function, `calculatePrice()` that:

**takes the number of tickets to be purchased as a parameter
calculates and returns the total price to pay.**

You must use either:

**OCR Exam Reference Language, or
a high-level programming language that
you have studied. [4]**

(ii) Write an algorithm that:

**uses the function `calculatePrice()`
to find the price for a visitor buying 3
tickets
stores the result in the variable
`totalPrice`**

You must use either:

**OCR Exam Reference Language, or
a high-level programming language that
you have studied.**

[2]

- (d) The number of different music acts on each of the three stages is stored in the array `actNumbers`.

Each index of the array represents one stage.

Index	0	1	2
Data	10	14	6

`actNumbers`

This algorithm adds up the total number of acts on all three stages.

```
01 count = 0
02 for x = 0 to 2
03     count = count + actNumbers[x]
04 next x
05 print(count)
```

(i) Complete the trace table for the algorithm. You may not need to use all rows in the table. [4]

Line number	count	x	Output

(ii) The array `actNumbers` is changed to include data for two more stages. The new array is shown:

Index	0	1	2	3	4
Data	10	14	6	9	11

`actNumbers`

The algorithm from part (i) needs refining to work for the new array. The algorithm is repeated here:

```
01 count = 0
02 for x = 0 to 2
03     count = count + actNumbers[x]
04 next x
05 print(count)
```

Identify the line number that will need to be changed for the new array and write the updated line of code.

Line number _____

Updated code _____

[2]

(iii) Refine line 05 in the algorithm to output "The total act count is " and then the content of the variable count

For example:

The total act count is 50

New line 05 _____

[1]

- (e) There are 500 tickets available for the music festival. The number of tickets currently available is stored in the variable `tickets`

Complete the algorithm to:

prompt the user to enter how many tickets they would like and take this value as input

output "Tickets booked" and reduce the value stored in `tickets` if there are enough tickets available

output "Not enough tickets" if there are not enough tickets available

repeat the steps until there are no tickets left.

You must use either:

OCR Exam Reference Language, or
a high-level programming language that you have studied

```
tickets = 500 [6]
```

[illegible]

END OF QUESTION PAPER

EXTRA ANSWER SPACE

If you need extra space use these lined pages. You must write the question numbers clearly in the margin.

[illegible]



Copyright Information

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website (www.ocr.org.uk) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact The OCR Copyright Team, The Triangle Building, Shaftesbury Road, Cambridge CB2 8EA.

OCR is part of Cambridge University Press & Assessment, which is itself a department of the University of Cambridge.